


# CLASSIC HIGH CHAIR AND BISTRO REPLACEMENT STRAP INSTRUCTIONS


Active Restraint Strap for the KB103 Classic High Chair and  
KB317/318 Bistro High Chair  
P/N 740-KIT

## Hardware Supplied

Two Plastite Screws



Two Modified Truss Head Wood Screws





### Tools Required:

Phillips Head Screwdriver

### Classic High Chair

1. To remove the restraint strap, unscrew the two chafe tabs at back and pull the straps out through the slots. Discard the old strap and screws.

2. To install the new strap, thread the chafe tabs back through the slots. Using the Plastite Screws provided, tighten the screws into the back of the chair seat.

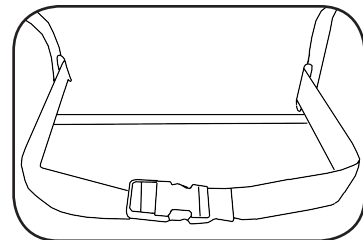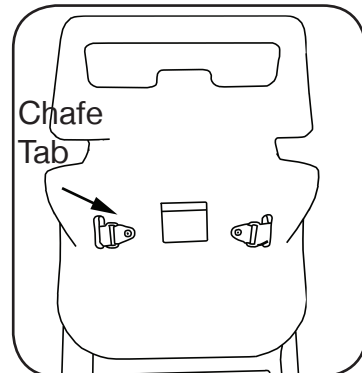

### Bistro Chair

1. To remove the restraint strap, unscrew the two chafe tabs on the underside of the chair. Discard the old strap and screws.

2. To install the new strap, lay strap flat on the seat of the chair, bring the chafe tabs around to the underside of the chair seat. With the Modified Truss Head Wood Screws provided, tighten the chafe tabs into the underside of the chair.

