

# DuraLineSeries® MAXIMUM HEIGHT CLASS A FIRE-RESISTANT PARTITIONS AND SCREENS


# **2180 SERIES**

# **Specify Product Application:**

- ☐ Toilet Partitions
- ☐ Dressing Compartments
- □ Urinal Screens
- ☐ Entrance Screens
- ☐ With Outswing Door
- □ With Institutional Hardware (.67)

# Specify Series Required:

- ☐ 2181 Series Floor-Anchored
- □ 2182 Series Overhead-Braced□ 2183 Series Post-to-Ceiling (Screens only)
- ☐ 2186 Series Floor-to-Ceiling Anchored
- □ 2188 Series Ceiling-Hung for 8' 0" (244cm) Ceilings or
  - as required up to 10' 0" (305cm) Ceilings



# STANDARD-SIZE COMPONENTS:

Stiles: For compartments —  $8^{11e}$ ,  $10^{11}$ ,  $12^{11}$ ,  $16^{11}$ ,  $20^{11}$ , or  $24^{11}$  (20, 25, 30, 41, 51, or 61cm) wide; for screens —  $6^{11}$  (15cm) wide. Floor-anchored — 75-5/16" (194cm) high; overhead-braced —  $83^{11}$  (211cm) high; floor-to-ceiling anchored — height as required; ceiling-hung —  $83^{11}$  (211cm) high for  $8^{11}$  0" (244cm) ceilings or as required up to  $10^{11}$  0" (305cm) ceilings.

**Doors:** 72" (183cm) high. *Inswing doors* are standard for 22" to 37" (56–94cm) widths in whole-inch increments. *Outswing<sup>b</sup> doors* are standard for 25" to 37" (64–94cm) widths in whole-inch increments.


**Panels:** For compartments — Up to 84" (213cm) wide, 72" (183cm) high. For ceiling-hung and post-to-ceiling screens — 24", 36", 48", or 60" (61, 91, 122, or 152cm) wide; 58" (147cm) high.


**Note:** If the width of the panel exceeds 60" (152cm) the panel will be two pieces and require an H Channel to obtain 72" (183cm) height requirement.

**Posts:** For 2183 Series post-to-ceiling screens only. 1-1/4" (3cm) square. 10 ft (305cm); cut to required height in field.

- <sup>a</sup> Minimum 8" (20cm) wide stile is required for all maximum-height compartments.
- Use outswing doors to comply with local codes requiring access for physically disabled persons.

# **COMPARTMENT AND SCREEN ELEVATIONS**

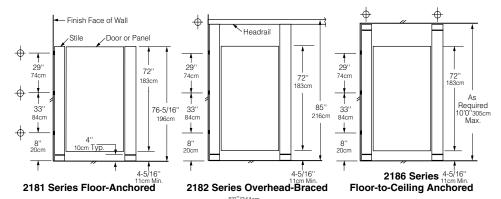




# 2188 Series Ceiling-Hung

# 2183 Series Post-to-Ceiling Screen


These mounting points require backing. For suggested backing methods, Bobrick Advisory Bulletins TB-32 for ceiling-hung installations and TB-46 for floor-anchored are available upon request.

# TYPICAL HARDWARE DETAILS

# Commercial Hardware (standard on all compartments)



# Institutional Hardware (.67 option)



Standard gaps are provided at all walls and between components to allow for hardware attachment

Wall gaps are standard 1/2" to 1"


# TYPICAL INSTALLATION DETAILS Floor Leveling Device


# Threaded Rod Hex Nut Lock Washer Flat Washer Flat Washer Wedge Anchor

Side

Front

# Overhead-Bracing





**Ceiling Leveling Device** 

Front Side

#### MATERIALS:

Stiles\* — 3/4" (19mm) thick, solidly fused plastic laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black. **Leveling Device:** 3/16" (5mm) thick, corrosion-resistant, chromate-treated, double zinc-plated steel angle leveling bar bolted to stile; furnished with 3/8" (10mm) diameter threaded rods, hex nuts, lock washers, flat washers, spacer sleeves, expansion anchors, and shoe retainers. **Shoe:** 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish; 4" (102mm) high.

\*Stiles for 2186 Series floor-to-ceiling anchored units have a leveling device at each end.

Panels — 1/2" (13mm) thick, solidly fused plastic laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

Urinal Screens — 3/4" (19mm) thick, solidly fused plastic laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

Doors — 3/4" (19mm) thick, solidly fused plastic laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

Posts (for 2183 Series screens only) — 1-1/4" (32mm) square tubing; 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. Floor and ceiling connections are constructed of 18-8 S, type-304, heavy-gauge stainless steel. Furnished in 10-ft (305-cm) lengths; to be cut in field to job specifications.

Headrail (for 2182 Series compartments only) — Extruded anodized aluminum with satin finish. Enclosed construction with sloping top. Face has raised grip-resistant edge. Designer's Notes: Headrails with integral curtain tracks and hooks are available for compartments without doors. Optional vinyl curtains are available. Benches are available as an optional accessory for dressing compartments and shower dividers: 1/2" (13mm) thick, solidly fused plastic laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded, 10" (25cm) deep, 18" or 24" (46 or 61cm) wide; furnished with two stainless steel support brackets for mounting to wall or divider panel.

Commercial Hardware (standard) — Hinges, door latches, door keepers, clothes hooks, and mounting brackets are constructed of 18-8 S, type-304, heavy-gauge stainless steel with satin finish. Threaded inserts are factory installed for securing hinges and door latch. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware and all mounting brackets. Black rubber bumper on the latch serves as door bumper for inswing door. Balanced hinge is adjustable to hold door of unoccupied toilet compartment partially open or fully closed. Toilet compartment door is locked from inside by sliding door latch into keeper. A locked compartment may be opened from outside by lifting door to disengage latch from keeper. Track of door latch prevents inswing door from swinging out beyond stile; on outswing door, the door keeper prevents it from swinging in beyond stile.

Institutional Hardware (.67 option) — Hinges, door latches, U-channels, and angle brackets are constructed of 18-8 S, type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height hinge is 16 gauge (1.6mm); one-piece door keeper is 11 gauge (3.2mm); one-piece, full-height U-channels and angle brackets are 18 gauge (1.2mm). U-channels secure panels to stiles, and angle brackets secure panels and stiles to walls. Door latch slides on a shock-resistant nylon track. A locked compartment may be opened from outside by lifting door to disengage latch from keeper. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware, U-channels, and angle brackets. Doors are equipped with a self-closing hinge. Threaded inserts are factory installed to secure door hinge and latch. Track of door latch prevents inswing door from swinging out beyond stile; on outswing door, the door keeper prevents it from swinging in beyond stile.

To specify Institutional hardware, add suffix .67 to series number. Example: specify 2182.67 for overhead-braced, maximum-privacy partitions furnished with Institutional hardware, including factory-installed threaded inserts for door hardware attachment.

#### INSTALLATION:

Bobrick installation instructions are packed with each shipment and are available also in advance on request.

#### Notes:

- Ceiling-hung and floor-to-ceiling toilet compartments require structural members (not furnished by Bobrick) in ceiling. For suggested types of ceiling support systems, see Bobrick Advisory Bulletin TB-32.
- 2. Wall backing is required to secure the mounting brackets of panels, stiles, and wall posts. For suggested wall backing, see Bobrick Advisory Bulletin TB-46.
- 3. Floor-anchored stiles are furnished with expansion shields and threaded rods. The expansion shields require minimum 2" (50mm) penetration into minimum 3" (75mm) thick structural concrete
- 4. Bobrick stainless steel partition-mounted washroom accessories are available for mounting in panels between two compartments. See current Bobrick Catalog for description of accessories. Cutouts in panels can be pre-cut for Bobrick models at factory if location and size of all cutouts and Bobrick model numbers are furnished at time of order.
- 5. Where water from showers come into contact with partitions, Bobrick 1080 water-resistant, solid phenolic partitions are recommended.
- 6. If the width of the panel exceeds 60" (152cm) the panel will be two pieces and require an H Channel to obtain 72" (183cm) height requirement.
- 7. When the cam has been set at the desired free resting postion, "either closed or open" the top of the affixed components will be aligned.

# **GUARANTEE**

Bobrick toilet partitions including all hardware and mounting brackets are guaranteed to be free from defects in material and workmanship for a period of one year from date of purchase. Any products returned to Bobrick under this guarantee will be repaired or replaced at no charge. 10-Year Warranty: Bobrick extends a ten-year limited warranty from date of purchase for DuraLineSeries™ solid phenolic partition panels, doors, and stiles against breakage, corrosion, delamination, and defects in factory workmanship when materials are properly installed, then used and serviced normally.

# SPECIFICATION:

\*\*To specify Institutional hardware, replace end of specification paragraph with: .67 option All door hardware, U-channels, and angle brackets shall be type-304 stainless steel with satin finish: one-piece, full-height hinges shall be 16 gauge (1.6mm); one-piece door keepers shall be 11 gauge (3.2mm); one-piece, full-height U-channels and angle brackets shall be 18 gauge (1.2mm). U-channels shall be furnished to secure panels to stiles, and angle brackets furnished to secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, torx screws shall be furnished for door hardware, U-channels, and angle brackets. Hinges shall allow locked compartment to be opened in emergency from outside by lifting door to disengage latch from keeper. Doors shall be equipped with a self-closing hinge. Threaded inserts shall be factory installed to secure all door hinges and latches.

\_\_\_\_\_\_ (insert one: Toilet Partitions, Dressing Compartments, Shower Dividers, Urinal Screens, Entrance Screens) shall be \_\_\_\_\_\_ Series (insert series number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.